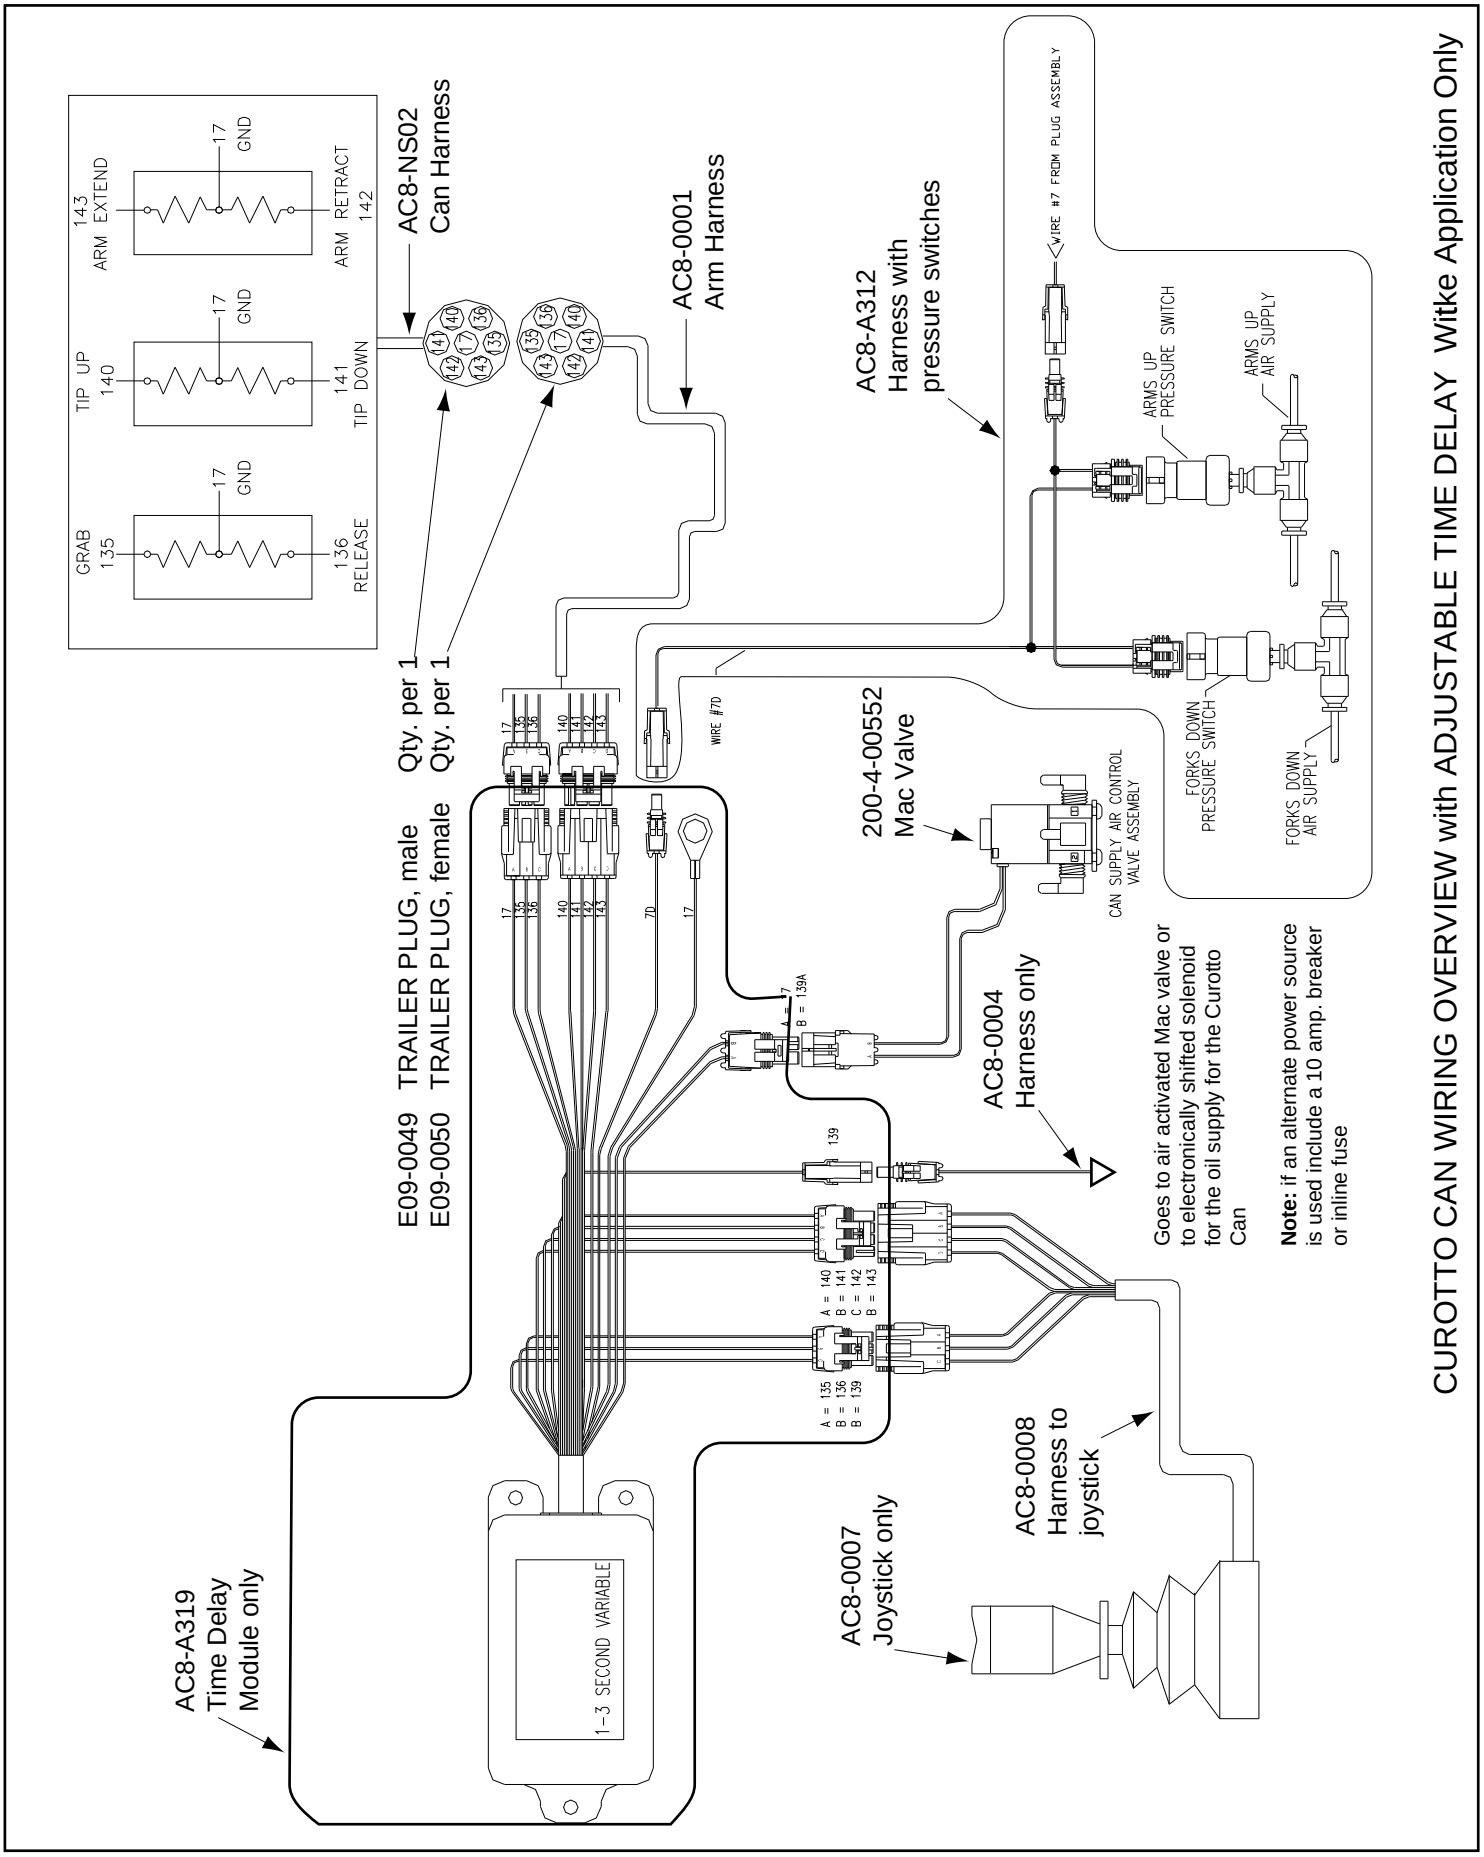
CUROTTO CAN WIRING OVERVIEW with ADJUSTABLE TIME DELAY Witke Application Only
GRAB 135
17 GND
136 RELEASE
TIP UP 140
17 GND
141 TIP DOWN
143 ARM EXTEND
17 GND
ARM RETRACT 142
AC8-NS02 Can Harness
Qty. per 1
Qty. per 1
AC8-0001 Arm Harness
AC8-A312 Harness with pressure switches
WIRE #7 FROM PLUG ASSEMBLY
ARMS UP PRESSURE SWITCH
ARMS UP AIR SUPPLY
FORKS DOWN PRESSURE SWITCH
FORKS DOWN AIR SUPPLY
E09-0049 TRAILER PLUG, male
E09-0050 TRAILER PLUG, female
WIRE #7D
200-4-00552 Mac Valve
CAN SUPPLY AIR CONTROL VALVE ASSEMBLY
A = 17
B = 139A
AC8-0004 Harness only
Goes to air activated Mac valve or to electronically shifted solenoid for the oil supply for the Curotto Can
Note: if an alternate power source is used include a 10 amp. breaker or inline fuse
139
A = 140
B = 141
C = 142
B = 143
A = 135
B = 136
B = 139
AC8-0008 Harness to joystick
AC8-0007 Joystick only
AC8-A319 Time Delay Module only
1-3 SECOND VARIABLE